

# SUNNY ISLAND 5048U



- Suitable for systems from 3 kW to 25 kW
- AC coupling of all energy sources
- DC coupling with optional equipment

- Fully automatic uninterrupted operation
- Single, split, and 3-phase, connectable in parallel and modularly expandable

- Excellent overload characteristics for motor starting
- Long battery service life due to optimal battery management system

- Robust, reliable and durable
- Compatible with Sunny Family products




## SUNNY ISLAND 5048U

Battery-based inverter for off-grid and back-up applications

The Sunny Island 5048U is the ideal solution for off-grid and grid back-up systems. It has incredible surge capability and a peak efficiency of 95% making it both powerful and cost-efficient. The Sunny Island 5048U utilizes removable MMC/SD cards for storage of performance data by the integrated data logger and for easy firmware upgrades. Its intuitive interface features preconfigured settings for faster commissioning. Wherever reliable, high quality electricity is needed, depend on the Sunny Island 5048U to deliver.

# Technical Data

	<b>Sunny Island 5048U</b>
Nominal AC Voltage (Adjustable)	120 V (105 - 132 V)
Nominal Frequency (Adjustable)	60 Hz (55 - 65 Hz)
Continuous AC Output at 77 °F / 113 °F	5000 / 4000 W
AC Output Power at 77 °F for 30 / 5 / 1 min	6500 / 7200 / 8400 W
Nominal AC Current	41.7 A
AC Maximum Output Current	150 A (for 100 ms)
Output Voltage Harmonic Distortion Factor	< 3%
Power Factor	-1 to 1
Input Voltage (Range)	120 V (80 - 150 V)
Input frequency (Range)	60 Hz (54 - 66 Hz)
AC Maximum Input Current (Adjustable)	56 A (2 - 56 A)
Maximum Input Power	6.7 kW
Battery Voltage (Range)	48 V (41 - 63 V)
Maximum Battery Charging Current	120 A
Continuous Charging Current	100 A
Battery Capacity	100 - 10 000 Ah
Charge Control	IUQ with automatic full and equalization charge
Peak Efficiency (Typical)	95%
Internal Consumption with No Load (Standby)	25 W (< 4 W)
Enclosure Type	NEMA 1
Certification	UL 1741 / UL 1998
Device Protection	short-circuit, overload, over-temperature
Interfaces	2 LEDs, 4 buttons, 2-line display, MMC/SD card, 2 multifunction relays, RS485 / RS232 / CAN electrically separated (optional)
Dimensions: W x H x D in inches	18.4 x 24.1 x 9.3
Weight	139 lbs
Ambient Temperature Range	-13 to 122 °F
Warranty	5-year
External Battery Temperature Sensor	included
"GenMan" Generator Manager	optional

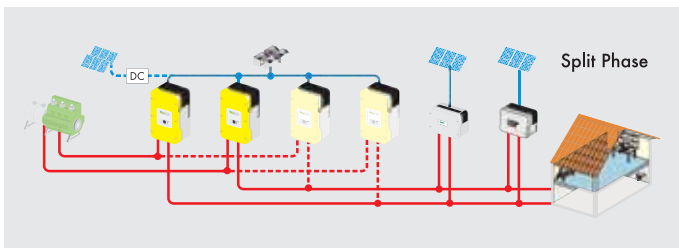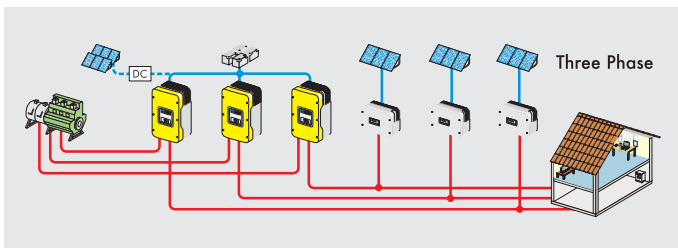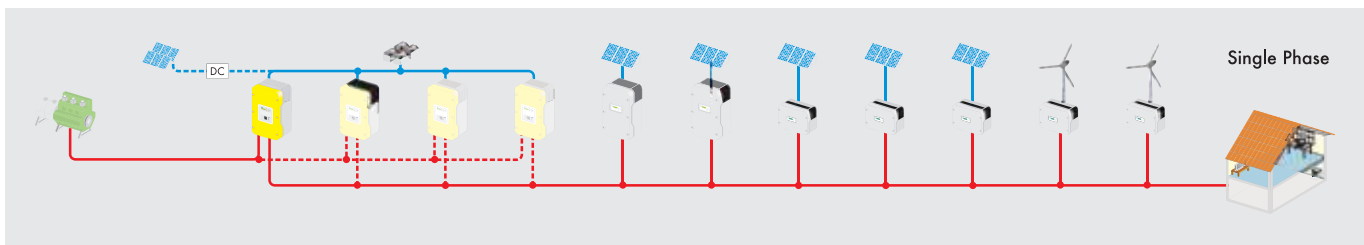

SUNNY ISLAND 5048U-DUS09401.3 SMA and Sunny Island are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors.

Tel. +1 916 625 0870  
 Toll Free +1 888 4 SMA USA  
[www.SMA-America.com](http://www.SMA-America.com)

**SMA America, LLC**